

00299-WH: with 4X3W White high power LED.  
 00299-BU: with 4X3W Blue high power LED.  
 00299-GN: with 4X3W Green high power LED.  
 00299-GW: with 2X3W Green and 2X3W White high power LED.  
 00299-BW: with 2X3W Blue and 2X3W White high power LED.  
 00299-BG: with 2X3W Blue and 2X3W Green high power LED.  
 00299-6WH: with 6X3W White high power LED.  
 00299-6BU: with 6X3W BU high power LED.

## !Notice!

"The underwater light warranty only covers the replacement of defective parts, not the towing, launching and replacement costs."

## SPECIFICATION


Housing description: Made of SS316

Operating voltage: DC 10-30 Volts


## INSTALLATION INSTRUCTION

1. This light is designed with water cooling system, DO NOT obstruct the water cooling passages behind the light. MUST BE installed under waterline and used only when SUBMERGED.
2. For 3 mounting holes, drill 9/64" diam. x 1/2" deep & countersink 1/4", fill up the countersinks with sealant
3. For wire passage hole, drill 16mm diam. x 14mm deep, in the center of this hole drill 1/4" hole through the transom.
4. In the back of the light, overfill the cup around the wire with sealant and slide the wire through the transom. Do not put sealant outside of the cup.
5. Place the light over the holes and push slowly to allow the sealant to fill the center hole in the transom, then tight the 3 screws.

WIRING DIAGRAM for  
 00299-WH/00299-BU/00299-GN  
 00299-6BU/ 00299-6WH

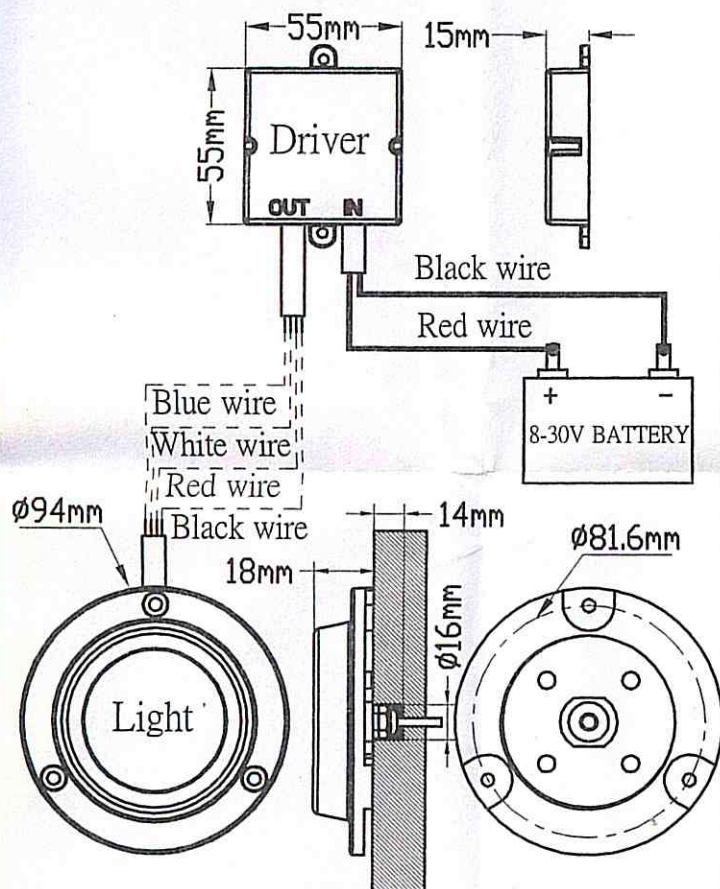

WIRING DIAGRAM for  
 00299-GW/00299-BW  
 00299-BG

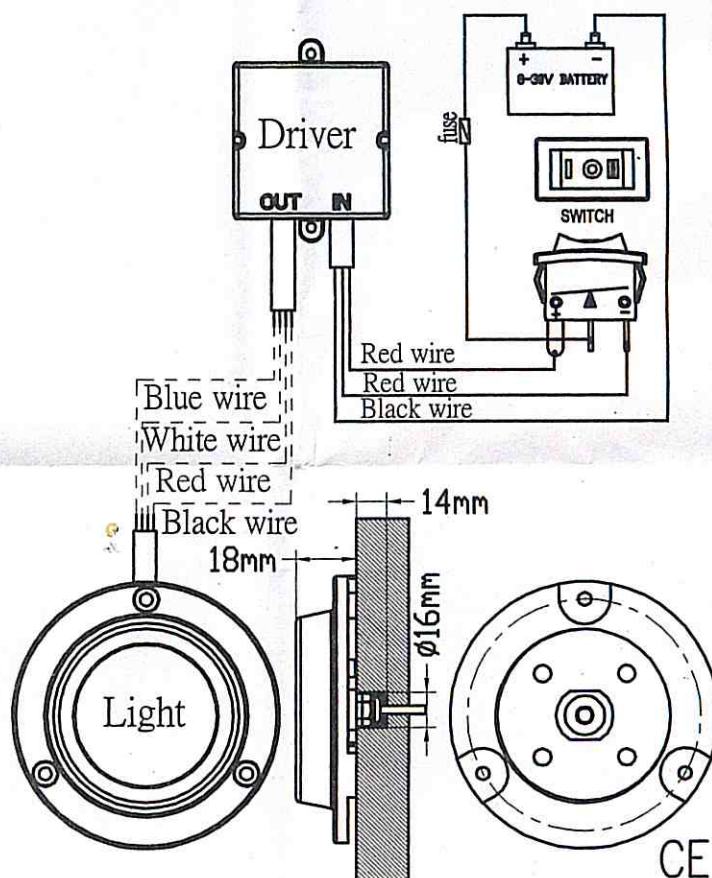

CE