
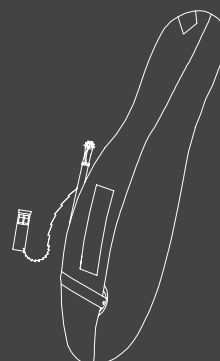
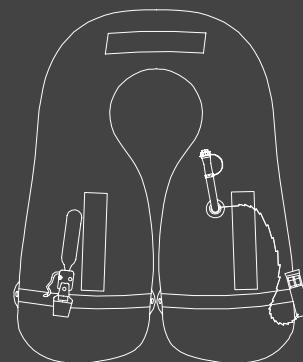
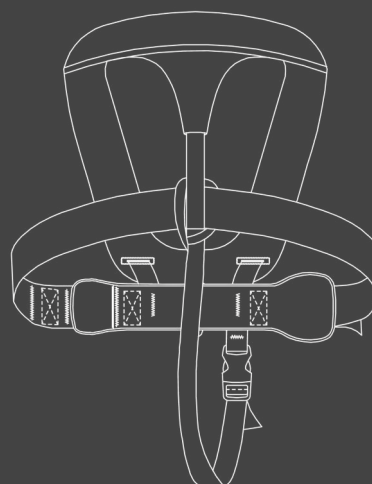


# SPINNAKER JUNIOR SAFE 4.0

| FEATURES                                                                                           |                                                                                                                             |
|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| codes: 09335/SAFE 4.0/NEON - 09335/SAFE 4.0/ORANGE - 09335/SAFE 4.0/LUMINOR                        |                                                                                                                             |
| Type                                                                                               | Inflatable life jacket                                                                                                      |
| Activation Systems                                                                                 | UML MK5 (codes: 09335/SAFE 4.0/NEON - 09335/SAFE 4.0/ORANGE - 09335/SAFE 4.0/LUMINOR automatic<br>Oral tube on all versions |
| Canister                                                                                           | 24 g 1/2" GAS threading                                                                                                     |
| Effective buoyancy                                                                                 | 100 N                                                                                                                       |
| Class                                                                                              | 150                                                                                                                         |
| Fastening mechanism                                                                                | Safety harness with double "D" ring, 45mm strap with SS40 Buckle                                                            |
| Certifications                                                                                     | ISO 12402-3, ISO 12401                                                                                                      |
| Size                                                                                               | Junior                                                                                                                      |
| Weight supported                                                                                   | 20/50 kg                                                                                                                    |
| Waist circumference                                                                                | 55 - 86 cm                                                                                                                  |
| Casing                                                                                             | NEOPRENE+PES+PP                                                                                                             |
| Chamber                                                                                            | Single, PA 420 PU COATED material, fluorescent yellow in colour                                                             |
| Product packaging                                                                                  | Cardboard Hanger                                                                                                            |
| Product dimensions                                                                                 | Approx. 45 x 38 x 6 cm                                                                                                      |
| Product weight                                                                                     | 930 g                                                                                                                       |
| Packaging                                                                                          | 60 x 40 x 40 cm                                                                                                             |
| Warranty                                                                                           | 24 months                                                                                                                   |
| Inspection                                                                                         | Every 24 months                                                                                                             |
| Accessories on request                                                                             | Safety line, automatic emergency light , Sprayhood                                                                          |
| Spare parts                                                                                        | Crotch strap, whistle and rearming kit                                                                                      |
| Veleria San Giorgio reserves the right to modify the technical specifications without prior notice |                                                                                                                             |

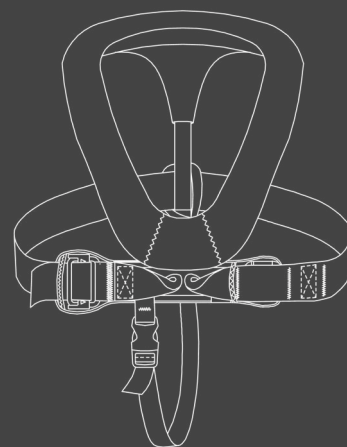

# SPINNAKER JUNIOR SAFE 4.0

ISO 12402-3 certified inflatable life jacket, class 150, effective buoyancy >180 N, integrated ISO 12401 harness with side-adjustment clasp, double "D" ring and SS40 Buckle.

Designed for leisure activities in the open sea and/or under adverse weather conditions, it guarantees maximum safety for any type of navigation. Suitable for wearing over any garment.

Compact and comfortable, it offers the utmost freedom and mobility on board. Double "D" ring ensures the best safety, free from any impediment.



VERSIONE ORANGE

## CASING FEATURES

- Inner breathable padded mesh
- Zipper closure with Quick Open System
- Side-adjustment clasp with a new Ergonomic design
- Waist tape with quick open buckle
- Quick-release crotch strap with buckle
- Rescue assistance loop
- Lifting handle

## ON REQUEST:

- Luminous Edging (Lumen Version) To facilitate identification while on the move aboard the boat

VERSIONE NEON



VERSIONE LUMINOR



## VERSIONS

| CODE                   | PRODUCT NAME              | ACTIVATION | ACTIVATORS |
|------------------------|---------------------------|------------|------------|
| 09335/SAFE4.0/NEON     | SPINNAKER JUNIOR SAFE 4.0 | AUTOMATIC  | UML MK5    |
| 09335/SAFE 4.0/ORANGE  | SPINNAKER JUNIOR SAFE 4.0 | AUTOMATIC  | UML MK5    |
| 09335/SAFE 4.0/LUMINOR | SPINNAKER JUNIOR SAFE 4.0 | AUTOMATIC  | UML MK5    |

# SPINNAKER JUNIOR SAFE 4.0



Floatation chamber with single compartment in PA 420 PU COATED material with electronically-controlled high-frequency welds. Provides optimal positioning and perfect stability in the water. The thrust rotates an unconscious person and angles them so as to keep their airway free of water. What's more, once the chamber is inflated, it is possible to swim unimpeded to reach safety or to quickly climb into a lifeboat.

## ACTIVATION SYSTEMS:

- Automatic: upon falling into the water, the system automatically activates within 5 seconds of submersion, with the inflation of the floatation chamber. Automatic activation occurs thanks to the salt activator UML MK5.
- Oral: this type of inflation is achieved via the special mouth tube, with a non-return valve and protective cap. To inflate the chamber, simply blow into the tube. This will be useful for a further swelling/deflation awaiting emergency.

# SPINNAKER JUNIOR SAFE 4.0

## SPARE PARTS

|                                                                                   |                                                                                                                                          |  |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | Crotch strap                                                                                                                             |  |
|                                                                                   | 09330/SAFE4.0/NEON/SOTTOG                                                                                                                |  |
|                                                                                   | 09330/SAFE4.0/ORANGE/SOTTOG                                                                                                              |  |
|                                                                                   | Use of this accessory improves the body's inclination, stability and positioning in the water.                                           |  |
|                                                                                   | Rearming                                                                                                                                 |  |
|                                                                                   | UML: rearming kit (26238), water-soluble tab (25005), green pin MK5 (25003/MK5)<br>Hammar: rearming kit (26338)<br>Canister 38 g (26038) |  |

## ACCESSORIES

|                                                                                     |                                                                                                                        |            |                                                                                      |                                                                                                                                            |            |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------|
|    | Transport Bag                                                                                                          | 09900      |    | Sprayhood                                                                                                                                  | 09145/SK   |
|                                                                                     | Dimensions: 55X35 cm<br>Material: Polyester                                                                            |            |                                                                                      | Reduces the risk of secondary drowning via inhalation of nebulised water. Improves detection of the castaway.                              |            |
|  | Elast. 2 aluminium hooks                                                                                               | 11177      |   | 2 aluminium hooks                                                                                                                          | 11174/OVER |
|                                                                                     | Length: 2 metres<br>Material: Aluminium                                                                                |            |                                                                                      | Length: 2 metres<br>Material: Aluminium                                                                                                    |            |
|  | 3 aluminium hooks                                                                                                      | 11175/OVER |  | Elast. 2 steel hooks                                                                                                                       | 11176      |
|                                                                                     | Length: 1.4-2 metres<br>Material: Aluminium                                                                            |            |                                                                                      | Length: 2 metres<br>Material: Stainless steel                                                                                              |            |
|  | 2 steel hooks                                                                                                          | 11173/OVER |  | Steel hook + ring                                                                                                                          | 11178      |
|                                                                                     | Length: 2 metres<br>Material: Stainless steel                                                                          |            |                                                                                      | Length: 2 metres<br>Material: Stainless steel                                                                                              |            |
|  | UML adapter                                                                                                            | 25007      |  | LED light                                                                                                                                  | 03030      |
|                                                                                     | To render automatic an activator, operating only manually<br>NB: The UML adapter is not a spare part but an accessory. |            |                                                                                      | Automatically activates upon falling into the water. Renders the device visible for up to a mile. SOLAS M.E.D.-certified and USCG approved |            |



Remember to conduct a periodic inspection.  
Book an inspection now by emailing us at: [info@veleriasangiorgio.com](mailto:info@veleriasangiorgio.com)



For more information, contact us at +39 0185 467701 or via our website [veleriasangiorgio.com](http://veleriasangiorgio.com)



To buy or learn more about this product, please refer to the QR Code or visit [veleriasangiorgio.com](http://veleriasangiorgio.com)



LIFE JACKETS AND LIFEBELTS, FLAGS AND BANNERS, TECHNICAL ITEMS, PERSONAL PROTECTIVE EQUIPMENT AND SAFETY

GEAR FOR CIVILIAN AND MILITARY FIELDS

Via Alcide De Gasperi, 37H - 16030 Casarza Ligure - Genoa - Italy

Tel. +39 0185 467701 - Fax +39 0185 467050 - [info@veleriasangiorgio.com](mailto:info@veleriasangiorgio.com) - [www.veleriasangiorgio.com](http://www.veleriasangiorgio.com)



**EU TYPE EXAMINATION CERTIFICATE****CERTIFICATE Nr. PPE063424CS/002**

*We certify, as notified body (no.0474), that the following personal protective equipment is in compliance with the essential safety requirements of the Regulation (EU) 2016/425.*

*Description***Life jackets***Type***SPINNAKER BABY****09335***Manufacturer***VELERIA SAN GIORGIO S.R.L.**

VIA ALCIDE DE GASPERI 37 H

16030 Casarza Ligure (GE)

ITALY

*Reference standards***EN ISO 12401:2009; EN ISO 12402-3:2020, EN ISO 12402-9:2020***Reference documents***Regulation for the certification of Personal Protective Equipment (RC/C.127)***Issued in Genoa on*  
May 24, 2024*This Certificate is valid until*  
May 23, 2029

*This Certificate consists of this sheet plus an attachment*

*This document is electronically signed by*

**Enrico Cabella**

---

**RINA Services S.p.A.**