
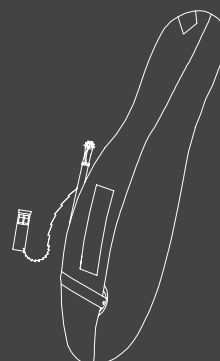
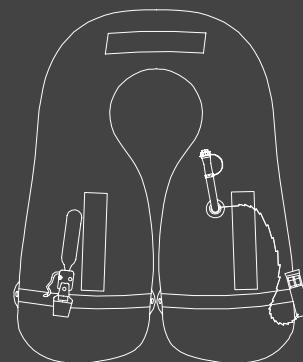
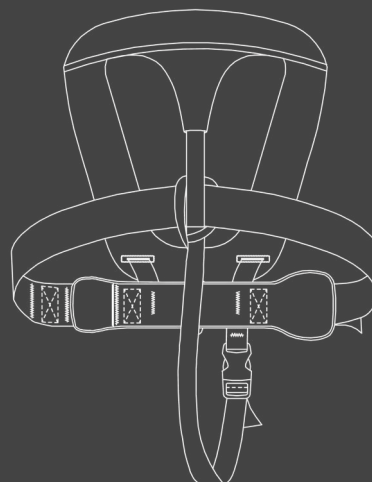


SPINNAKER JUNIOR SAFE 4.0

FEATURES	
codes: 09335/SAFE 4.0/NEON - 09335/SAFE 4.0/ORANGE - 09335/SAFE 4.0/LUMINOR	
Type	Inflatable life jacket
Activation Systems	UML MK5 (codes: 09335/SAFE 4.0/NEON - 09335/SAFE 4.0/ORANGE - 09335/SAFE 4.0/LUMINOR automatic Oral tube on all versions
Canister	24 g 1/2" GAS threading
Effective buoyancy	100 N
Class	150
Fastening mechanism	Safety harness with double "D" ring, 45mm strap with SS40 Buckle
Certifications	ISO 12402-3, ISO 12401
Size	Junior
Weight supported	20/50 kg
Waist circumference	55 - 86 cm
Casing	NEOPRENE+PES+PP
Chamber	Single, PA 420 PU COATED material, fluorescent yellow in colour
Product packaging	Cardboard Hanger
Product dimensions	Approx. 45 x 38 x 6 cm
Product weight	930 g
Packaging	60 x 40 x 40 cm
Warranty	24 months
Inspection	Every 24 months
Accessories on request	Safety line, automatic emergency light , Sprayhood
Spare parts	Crotch strap, whistle and rearming kit
Veleria San Giorgio reserves the right to modify the technical specifications without prior notice	

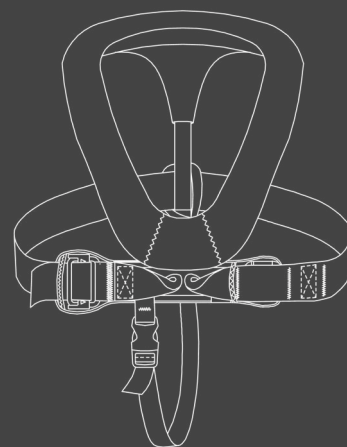

SPINNAKER JUNIOR SAFE 4.0

ISO 12402-3 certified inflatable life jacket, class 150, effective buoyancy >180 N, integrated ISO 12401 harness with side-adjustment clasp, double "D" ring and SS40 Buckle.

Designed for leisure activities in the open sea and/or under adverse weather conditions, it guarantees maximum safety for any type of navigation. Suitable for wearing over any garment.

Compact and comfortable, it offers the utmost freedom and mobility on board. Double "D" ring ensures the best safety, free from any impediment.

CASING FEATURES

- Inner breathable padded mesh
- Zipper closure with Quick Open System
- Side-adjustment clasp with a new Ergonomic design
- Waist tape with quick open buckle
- Quick-release crotch strap with buckle
- Rescue assistance loop
- Lifting handle

ON REQUEST:

- Luminous Edging (Lumen Version) To facilitate identification while on the move aboard the boat



VERSIONE ORANGE

VERSIONE NEON



VERSIONE LUMINOR



VERSIONS

CODE	PRODUCT NAME	ACTIVATION	ACTIVATORS
09335/SAFE4.0/NEON	SPINNAKER JUNIOR SAFE 4.0	AUTOMATIC	UML MK5
09335/SAFE 4.0/ORANGE	SPINNAKER JUNIOR SAFE 4.0	AUTOMATIC	UML MK5
09335/SAFE 4.0/LUMINOR	SPINNAKER JUNIOR SAFE 4.0	AUTOMATIC	UML MK5

SPINNAKER JUNIOR SAFE 4.0



Floatation chamber with single compartment in PA 420 PU COATED material with electronically-controlled high-frequency welds. Provides optimal positioning and perfect stability in the water. The thrust rotates an unconscious person and angles them so as to keep their airway free of water. What's more, once the chamber is inflated, it is possible to swim unimpeded to reach safety or to quickly climb into a lifeboat.

ACTIVATION SYSTEMS:

- Automatic: upon falling into the water, the system automatically activates within 5 seconds of submersion, with the inflation of the floatation chamber. Automatic activation occurs thanks to the salt activator UML MK5.
- Oral: this type of inflation is achieved via the special mouth tube, with a non-return valve and protective cap. To inflate the chamber, simply blow into the tube. This will be useful for a further swelling/deflation awaiting emergency.

SPINNAKER JUNIOR SAFE 4.0

SPARE PARTS

	Crotch strap	
	09330/SAFE4.0/NEON/SOTTOG	
	09330/SAFE4.0/ORANGE/SOTTOG	
	Use of this accessory improves the body's inclination, stability and positioning in the water.	
	Rearming	
	UML: rearming kit (26238), water-soluble tab (25005), green pin MK5 (25003/MK5) Hammar: rearming kit (26338) Canister 38 g (26038)	

ACCESSORIES

	Transport Bag	09900		Sprayhood	09145/SK
	Dimensions: 55X35 cm Material: Polyester			Reduces the risk of secondary drowning via inhalation of nebulised water. Improves detection of the castaway.	
	Elast. 2 aluminium hooks	11177		2 aluminium hooks	11174/OVER
	Length: 2 metres Material: Aluminium			Length: 2 metres Material: Aluminium	
	3 aluminium hooks	11175/OVER		Elast. 2 steel hooks	11176
	Length: 1.4-2 metres Material: Aluminium			Length: 2 metres Material: Stainless steel	
	2 steel hooks	11173/OVER		Steel hook + ring	11178
	Length: 2 metres Material: Stainless steel			Length: 2 metres Material: Stainless steel	
	UML adapter	25007		LED light	03030
	To render automatic an activator, operating only manually NB: The UML adapter is not a spare part but an accessory.			Automatically activates upon falling into the water. Renders the device visible for up to a mile. SOLAS M.E.D.-certified and USCG approved	



Remember to conduct a periodic inspection.
Book an inspection now by emailing us at: info@veleriasangiorgio.com



For more information, contact us at +39 0185 467701 or via our website veleriasangiorgio.com



To buy or learn more about this product, please refer to the QR Code or visit veleriasangiorgio.com



LIFE JACKETS AND LIFEBELTS, FLAGS AND BANNERS, TECHNICAL ITEMS, PERSONAL PROTECTIVE EQUIPMENT AND SAFETY

GEAR FOR CIVILIAN AND MILITARY FIELDS

Via Alcide De Gasperi, 37H - 16030 Casarza Ligure - Genoa - Italy

Tel. +39 0185 467701 - Fax +39 0185 467050 - info@veleriasangiorgio.com - www.veleriasangiorgio.com



EU TYPE EXAMINATION CERTIFICATE**CERTIFICATE Nr. PPE063424CS/002**

We certify, as notified body (no.0474), that the following personal protective equipment is in compliance with the essential safety requirements of the Regulation (EU) 2016/425.

*Description***Life jackets***Type***SPINNAKER BABY****09335***Manufacturer***VELERIA SAN GIORGIO S.R.L.**

VIA ALCIDE DE GASPERI 37 H

16030 Casarza Ligure (GE)

ITALY

*Reference standards***EN ISO 12401:2009; EN ISO 12402-3:2020, EN ISO 12402-9:2020***Reference documents***Regulation for the certification of Personal Protective Equipment (RC/C.127)***Issued in Genoa on*
May 24, 2024*This Certificate is valid until*
May 23, 2029

This Certificate consists of this sheet plus an attachment

This document is electronically signed by

Enrico Cabella

RINA Services S.p.A.